arXiv:1107.2432v1 [cs.GT] 12 Jul 2011

Knapsack Games and the Truth but not the Whole Truth*

Amotz Bar-Noy
Department of Computer Science
The Graduate Center of
The City University of New York
amotz@sci.brooklyn.cuny.edu

Yi Gai
Ming Hsieh Department of
Electrical Engineering
University of Southern California
ygai@usc.edu

Matthew P. Johnson
Department of Computer Science
and Engineering
The Pennsylvania State University
mjohnson@cse.psu.edu

Bhaskar Krishnamachari
Ming Hsieh Department of
Electrical Engineering
University of Southern California
bkrishna@usc.edu

George Rabanca
Department of Computer Science
The Graduate Center of
The City University of New York
grabanca@gc.cuny.edu

Abstract

We introduce the Knapsack Game, in which m identical resources are to be allocated among n selfish agents. Each agent requests some number of resources x_i and specifies its true valuation $v_i(x_i)$ for receiving them, to a central entity. We assume that the valuation functions exhibit diminishing marginal returns. The pairs $(x_i, v_i(x_i))$ can be thought of as size-value pairs defining a knapsack problem with capacity m. The central entity must use some publicly-known mechanism to solve this knapsack problem, deciding which requests to satisfy in order to maximize the social welfare. We motivate our formulation by noting an application to the classical communication-theoretic problem of power allocation to parallel channels.

Unfortunately, it turns out that the natural mechanism of computing an optimal solution to the knapsack problem instance specified by the requests gives the players the wrong incentives and yields an unbounded Price of Anarchy (PoA). Instead, and somewhat surprisingly, we show that a simpler mechanism, based on the knapsack *highest ratio greedy* algorithm, provides a PoA of 2. We also give an algorithm computing a Nash equilibrium strategy profile in $O((n \log m)^2)$ time. Our primary algorithmic result shows that extending the mechanism to multiple rounds can arbitrarily strengthen the guarantee. Specifically, in this extension, the m items are partitioned into k carefully-sized subsets, and then allocated successively in k consecutive knapsack games. We show that this mechanism yields a PoA of $1 + \frac{1}{k}$, yielding a graceful tradeoff between communication complexity and the social welfare.

The k-round result follows from our second major result, which shows a surprising analytical number-theoretic min-sup identity, and which may be of independent interest.

---

[*] Research was sponsored by the Army Research Laboratory and was accomplished under Cooperative Agreement Number W911NF-09-2-0053. The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the Army Research Laboratory or the U.S. Government. The U.S. Government is authorized to reproduce and distribute reprints for Government purposes notwithstanding any copyright notation here on.

1 Introduction

Efficiently allocating resources among multiple potential recipients is a central concern in both computer science and economics. In one of its simplest forms, a central entity or *auctioneer* must distribute a set of m identical, indivisible goods among n recipients or agents. Each agent has a valuation function associating a value to any number of items it might get, and the auctioneer wishes to maximize the social welfare, i.e., the total overall value, to the individuals, of the allocation.

Much of the mechanism design literature is concerned with using payments to give agents incentives to be truthful, in order to allow the mechanism to produce a socially good outcome—roughly speaking, to allocate items to the agents who want them most. Since the agents' valuation functions are private in such contexts, in a poorly designed mechanism an agent could manipulate the outcome to its advantage by falsely reporting its valuations.

In the present paper, in contrast, we initiate the study of a novel allocation setting in which honest agents reveal only a part of their valuation functions, a part they choose strategically. The fact that the agents must be truthful yet nonetheless can act selfishly decouples dishonesty from other sorts of antisocial behavior we might try to discourage (such as gluttony). In practice, the assumption of selfish agents' honesty may be justified through the presence of external mechanisms (e.g. laws, reputation, etc.) making it inadvisable to lie, or through cryptographic authentication methods. Nonetheless, even if agents are truthful and so incapable of lying outright, they may still try to deceive the auctioneer by omitting inconvenient facts—by telling the truth but *not* the whole truth. By assuming truthfulness, however realistic this assumption may be, we can analyze the difficulties due to selfishness per se, independent from the issue of truthfulness.

This combination of truthfulness and partial revelation is just one of four possible pairs of assumption choices that can be made in formulating a problem setting in this space, along two orthogonal dimensions: the agents' veracity and communication complexity (or metaphorically, soundness and completeness). First, agents could be assumed to be honest, thus always reporting their true valuations, or dishonest, in which case the mechanism designer must engineer incentives to encourage truthfulness. Second, agents could be assumed to be capable of revealing their full valuation functions to the auctioneer (and hence to know them), or only be able to reveal partial information about their valuations. The choices of honest or dishonest agents and full or partial revelation yield four interesting problem settings to analyze. Of these, three have been previously studied (see related work below), but, to the best of our knowledge, the assumption that agents are honest yet only partially (and strategically) reveal their private valuations has not been considered.

We next describe the specific problem we study within this setting.

1.1 Knapsack Game

We introduce the Knapsack Game, in which there are m identical resources to be distributed among n agents, each of whom has a private valuation function depending only on the number of items received. Each agent submits one request specifying its value $v_i(x_i)$ for x_i items—corresponding to a single point on the curve of its valuation function—which might be interpreted as a highly compact and possibly misleading representation of that curve. The auctioneer allocates the items with the goal of maximizing the social welfare of the agents, i.e. their total derived value. Lacking knowledge of what value, if any, that agent i would derive from fewer than x_i items, each agent is given either all x_i items requested or none. The pairs $(x_i, v_i(x_i))$ can therefore be thought of as size-value pairs defining a knapsack problem with capacity m.

Unlike in a traditional, non-strategic knapsack problem, in this novel Knapsack game formulation, the auctioneer's allocation algorithm has an impact on the requests made by agents and, in effect, on the instance of the problem that must be solved. Selfishness may cause an agent to request many items, some of which could more valuably go to someone else. Therefore we seek a mechanism that encourages agents to be relatively abstemious, or *not too greedy* in choosing their requests, and thereby produces an allocation yielding near-optimal social welfare.

An intuitively natural approach is to compute an optimal solution to the knapsack problem specified by the size-value pairs. Unfortunately, a simple example shows that the price of anarchy (PoA) of this mechanism is unbounded. Instead, and somewhat surprisingly, we show that a mechanism based on the knapsack problem's standard highest ratio greedy (HRG) allocation achieves a PoA of 2, i.e. a 2-approximation to the optimal allocation at Nash equilibrium. It is interesting to recall, in contrast, that in the centralized setting, when applied to a fixed instance of the knapsack problem, highest ratio greedy has unbounded approximation ratio. The optimal allocation we compare to here is the optimal allocation of items based on complete knowledge of all the valuation functions.

A second, extended knapsack game setting we study is one consisting of several rounds, each of which is itself a (singe-round) knapsack game. Specifically, in this extension the designer partitons the m items into k carefully-sized subsets, and then allocates them successively in k consecutive knapsack games. As such, the k-round knapsack game multiplies by a factor of k the amount of computation and communication involved, as well as the amount of (true) information the players are obliged to reveal. The benefit these additional expenses provide is an improved PoA, based on the value k, and converging to 1. The k-round mechanism applies the HRG to each (carefully constructed) round.

1.2 Contributions

We introduce the Knapsack Game and propose for it the highest-ratio (HRG) mechanism, which we show (Theorem 3.6) provides a PoA of 2 (assuming valuation functions giving diminishing marginal returns). Our primary algorithmic result shows that the extension of HRG to multiple rounds can arbitrarily strengthen the guarantee. We show (Theorem 4.3) that this mechanism yields a PoA of $1 + \frac{1}{k}$, yielding a graceful tradeoff between communication complexity and the social welfare.

This k-round result follows from our second major result, a surprising number-theoretic min-sup identity (Theorem 5.3), which may be of independent interest.

Other results include showing that $PoA = PoS$ when valuation functions are strictly monotonic, and an algorithm that can compute the Nash equilibrium strategy profile in $O((n \log m)^2)$ time.

1.3 Applications

One interesting application of the Knapsack Game is to the classic communication-theoretic problem of allocating power across parallel communication channels i so as to maximize the total information rate [11]. Shannon's classic information theory result shows that in an ideal additive Gaussian white noise channel, the normalized information capacity of the channel scales as a nearly logarithmic function of the allocated power x_i, specifically as $\log(1+x_i/n_i)$, where n_i is the receiver noise to channel gain ratio. However, this is an idealized upper bound. For non-ideal radios sending finite-size packets with a discrete set of modulation schemes over real wireless channels, the power to data-rate function, although likely to show diminishing returns, is not known in closed-form.

It can vary from one receiver to another due to natural variations in hardware, multipath fading, and external interference. The knapsack game could be used to model the behavior of a set of selfish radio receivers strategically revealing points from their own empirically determined power-rate function to a common transmitter that must use this partial information to figure out how to allocate power to each channel in order to maximize the total down-link data rate.

1.4 Related work

As noted above, the Knapsack Game we study in this paper models settings with honest agents that provide only partial revelation of their valuations. We now survey the other three related settings, as well as the area of mechanism design without money.

Honest, full revelation. If honest agents must truthfully report their full valuation functions, the auctioneer has complete information, and so selfishness on the part of the recipients is irrelevant. This setting can be modeled as a multiple-choice knapsack problem solvable by FPTAS [13]: for each player, introduce a class of knapsack items corresponding to each possible number i of unit items the player could receive (with weight i and value equal to that player's valuation for i items), with the restriction that at most one item from each class be can chosen for the knapsack.

Unhonest, full revelation. The combination of dishonest agents and full revelation of valuation functions has been widely studied in economics and algorithmic game theory as combinatorial auctions with identical items, or multi-unit auctions. The standard goal is to devise a *truthful* mechanism, i.e. a publicly known allocation algorithm that incentivizes agents to tell the truth, thus permitting the auctioneer to learn the true valuations (assuming perfect rationality) and thence to choose a good allocation.

The multi-unit auction problem was first studied by Vickrey, who presented an truthful mechanism for agents with downward sloping valuations [20], using *money* or currency transfer. In general, truthfulness can be achieved through VCG payments, but doing so depends on optimally solving the allocation problem optimally, which may intractable. Starting with the work of Nisan and Ronen [17], the field of algorithmic mechanism design has sought to reconcile selfishness with computational complexity. Multi-unit auctions have been studied extensively in this context, including truthful mechanisms for single-minded bidders [16, 5], and k-minded bidders [14, 8, 9].

Unhonest, partial revelation. The combination of dishonest agents and partial revelation of valuation functions has been introduced more recently. The main question in this setting concerns the extent to which limiting communication complexity affects mechanism efficiency. In [3, 4], for example, bid sizes in an single-item auction are restricted to be real number expressed by k bits. In the combinatorial auctions of [7], agent types are only possible revealed because a full revelation would require exponential space and communication (in the number of items).

Non-monetary mechanisms. We note that our Knapsack Game mechanisms do not involve money. As has been observed by Schummer and Vohra [18] and others, there are many situations in which currency transfer is illegal or impractical, including political decision making and organ donations, as well as many Internet-based applications. The study of strategyproof mechanisms without money was recently initiated by Procaccia and Tennenholtz [19] (see also [6]), which was followed by the adaptation of many previously studied mechanism design problems to the non-monetary setting, including the two-facility location problem [15], matching [2], approval voting [1], the generalized assignment problem [10], and allocating multiple heterogeneous items to two agents with additive valuations [12]. Analogously, Knapsack Game can be viewed as mechanism design without money for the more general problem of multi-unit auctions.

2 Preliminaries

A (single-round) knapsack game is specified by a set of agents or *players* $\mathcal{N} = \{1, .., n\}$, a set of m identical resources or items, and for each agent i a valuation function $v_i : \{0, ..., m\} \to \mathbb{R}_0^+$ denoting the value i derives from receiving different numbers of items. We assume all valuation functions satisfy $v_i(0) = 0$, are nondecreasing, and exhibit diminishing marginal returns:

$$v_i(x) - v_i(x-1) \geq v_i(x+1) - v_i(x)$$

The strategy or *request* of agent i is a pair $s_i(x_i) = (x_i, v_i(x_i))$ comprising the (integer) number x_i of items requested, and i's *true* valuation for x_i items. A *strategy profile* is an n-tuple of strategies $s(x_1, ..., x_n) = (s_1(x_1), ..., s_n(x_n))$. We denote by $\mathcal{S}_i = \{s_i(0), ..., s_i(m)\}$ the set of possible strategies for agent i, and by $\mathcal{S} = \mathcal{S}_1 \times ... \times \mathcal{S}_n$ the set of strategy profiles. A *mechanism* $M : \mathcal{S} \to 2^{\mathcal{N}}$ is an allocation algorithm that takes as input a strategy profile and outputs the set of *successful* agents (or *winners*) whose requests are *granted*. A valid mechanism needs to satisfy the constraint that $\sum_{i \in M(s)} x_i \leq m, \forall s \in \mathcal{S}$. Each player i is awarded either x_i items (the number of items it requests), or none. The payoff $u_i^M : \mathcal{S} \to \mathbb{R}_0^+$ of player i is accordingly either $v_i(x_i)$ or 0:

$$u_i^M(s(x_1, ..., x_n)) = \begin{cases} v_i(x_i) & \text{if } i \in M(s) \\ 0 & \text{if } i \notin M(s) \end{cases}$$

For a Knapsack Game G we will denote by $OPT^G = (a_1, ..., a_n)$ or OPT, when G is implied, an optimal allocation of items to agents. We denote the social welfare of the optimal allocation by $sw(OPT^G) = \sum_{i=1}^n v_i(a_i)$. We denote the social welfare of a strategy profile $s(x_1, ..., x_n)$ and mechanism M by $sw^M(s) = \sum_{i \in M(s)} v_i(x_i)$. When the mechanism M is implied we will use $sw(s)$ for $sw^M(s)$.

For a knapsack game G with mechanism M, a strategy profile $s(x_1, ..., x_n)$ is a *Nash equilibrium* if for any i and any $x_i' \in \{0, ..., m\}$, $u_i^M(s(x_1, ..., x_i, ..., x_n)) \geq u_i^M(s(x_1, ..., x_i', ..., x_n))$. The *Price of Anarchy* (PoA) bounds the ratio of the optimal social welfare and the social welfare of the worst Nash equilibrium in any Knapsack Game:

$$PoA^M = \sup_{\text{s: Nash eq.}} \frac{sw(OPT^G)}{sw^M(s)}$$

Our optimization goal is designing a mechanism with a good PoA. An intuitively natural mechanism to try is one optimally solving the induced knapsack problem. We show that this mechanism does not lead to a good PoA. Intuitively, this mechanism encourages agents to be extra greedy and request all items.

Proposition 2.1. *The mechanism that solves the induced knapsack problem optimally has* $PoA = \min\{n, m\}$.

Proof. We will show that $PoA \geq \min\{n, m\}$ by an example (see Fig. 1). Consider a knapsack game G with players $\mathcal{N} = \{1, ..., n\}$, m items, and valuation functions $v_1, ..., v_n$. Let $v_1(x_1) = 1 + \epsilon$,

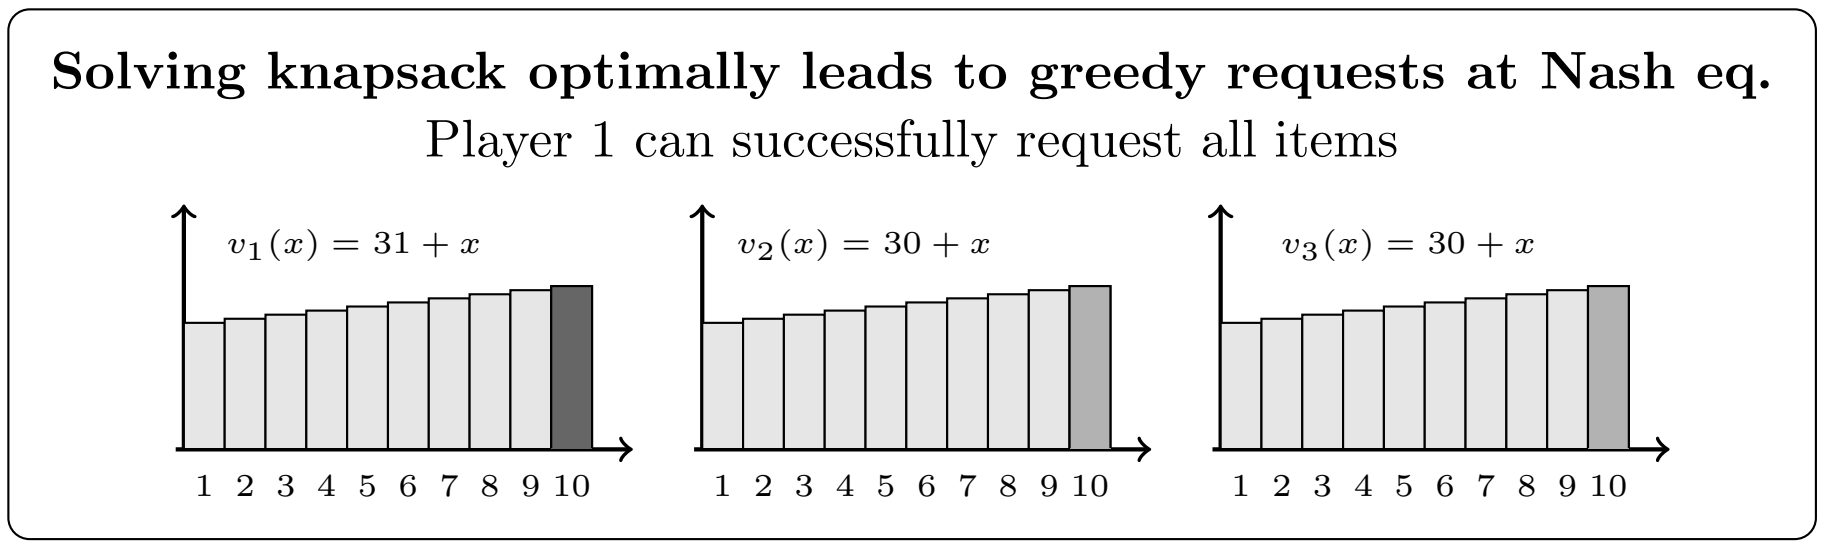

Figure 1: Example of a bad Nash Eq. for the optimal knapsack-based mechanism.

$1 \leq x_1 \leq m$ for some $\epsilon > 0$. Let $v_i(x_i) = 1$, for $2 \leq i \leq n$ and $1 \leq x_i \leq m$. Then at strategy profile $s(m, ..., m)$ the mechanism will allocate all items to player 1 since it optimally solves the knapsack problem with size-value pairs $\{(m, 1+\epsilon), (m, 1), ..., (m, 1)\}$. Player 1 cannot improve its payoff since $1 + \epsilon$ is its maximum payoff. If only one player requests less than m items, the mechanism still cannot satisfy more than one request and therefore awards all items to player 1. Therefore a player has no incentive to change strategies unilaterally. Then s is a Nash equilibrium with the social welfare $sw(s) = 1 + \epsilon$. The optimal allocation allocates one item to each player resulting in a social welfare of $\min\{n, m\}$.

To show the $PoA \leq \min\{n, m\}$, consider a game G with agents $\mathcal{N} = \{1, ..., n\}$, m items and valuation functions $v_1, ..., v_n$. Let i be one of the agents with the greatest valuation for m items: $v_i(m) \geq v_j(m)$, for $1 \leq j \leq n$. The social welfare of the optimal allocation OPT is then $sw(OPT) \leq v_i(m) \cdot \min\{n, m\}$. If the social welfare of some Nash equilibrium strategy profile s is greater than $v_i(m)$, player i could change its request and be allocated all items. Therefore, $PoA \leq \min\{n, m\}$. ☐

2.1 Highest Ratio Greedy (HRG) mechanism

We now define a mechanism following the standard highest ratio greedy algorithm of knapsack.

First, we define a total ordering over the set $\mathcal{S}_1 \cup ... \cup \mathcal{S}_n \setminus \{s_1(0), ..., s_n(0)\}$ of possible non-empty requests. Although the mechanism does not need to compare multiple requests of the same player, it is convenient to be able to compare two different potential requests of the same player when analyzing available alternatives of individual players, e.g. when analyzing the Nash equilibrium. Requests are sorted in descending order by the value-per-item ratio $v_i(x_i)/x_i$, with ties broken first by i (favoring lower indices over higher), and second by x_i (favoring fewer items requested over more). Notice that since valuation functions exhibit diminishing returns, $v_i(x_i)/x_i$ is a decreasing function of x_i, and so our tie-breaking rules preserve transitivity. These rules are stated formally in the following definition.

Definition 2.1. *We define a total order $\prec$ on non-zero-size requests. For all $i, j \in \mathcal{N}$ and any $a, b > 0$, we have $s_i(a) \prec s_j(b)$ if:*

- $v_i(a)/a > v_j(b)/b$, or
- $v_i(a)/a = v_j(b)/b$ *and* $i < j$, or
- $v_i(a)/a = v_j(b)/b$ *and* $i = j$ *and* $a < b$

The *Highest Ratio Greedy (HRG)* mechanism considers requests in the specified order, granting each that is then feasible.

Algorithm 1 Highest Ratio Greedy (HRG)

```
sort the non-empty requests in ascending order according to $\prec$
for each request $(x_i, v_i(x_i))$ in order do
    grant request $x_i$ if at least $x_i$ items remain available
end for
```

Definition 2.2. *The cutoff point* $\bar{s}$ *of a (sorted) strategy profile* $s(x_1, ..., x_n)$ *is the last request granted by the HRG mechanism, i.e., the request* s_i *with the property that* $s_j \prec s_i$ *for all* $j \neq i$ *in the set of winners* $HRG(s)$*.*

Example 1. Consider a knapsack game G with 3 players, $\mathcal{N} = \{1, 2, 3\}$ and $m = 10$ items to allocate. Let the valuation function $v_1(x_1) = 1$, $v_2(x_2) = x_2$ and $v_3(x_3) = 5$, $\forall\ x_1, x_2, x_3 \in \{1, ..., 10\}$. Let $s(6, 8, 4) = (s_1(6), s_2(8), s_3(4))$ be the strategy profile played. Then the HRG mechanism first sorts the strategies $s_3 \prec s_2 \prec s_1$, and then allocates the items in order of the requests. Player 3's request is granted and is allocated 4 items. Player 2's request is denied since only 6 items are left and player 2 requested 8 items. Finally, player 1's request is granted since there are enough items available to satisfy its request. The set of winning players is $HRG(s) = \{1, 3\}$.

The cutoff point for this strategy profile is $\bar{s} = s_1(6)$ since this is the last satisfied request. Strategy profile $s(6, 8, 4)$ is not a Nash equilibrium in this game since player 2 would get a better utility from requesting 6 items: $u_2(6, 8, 4) < u_2(6, 6, 4)$.

Remark: *Absent the assumption that valuation functions have diminishing marginal returns, the HRG mechanism has* $PoA \geq m$*.*

Proof. We will show that $PoA \geq m$ by an example. Consider a knapsack game with two players, $\mathcal{N} = \{1, 2\}$, m items, and valuation functions $v_1(x_1) = 1$, $\forall 1 \leq x_1 \leq m$ and, $v_2(x_2) = 0$, $\forall x_2 \neq m$ and $v_2(m) = m$. Then strategy profile $s(1, m) = (s_1(1), s_2(m))$ is a Nash equilibrium and $sw(s) = 1$.

Mechanism HRG sorts the strategy according to the total order previously defined. Since $v_1(1)/1 = v_2(m)/m = 1$, the strategies are ordered by agent index and $s_1(1) \prec s_2(m)$. Then HRG grants the request of agent 1, awarding it the one item it requested. Agent's 2 request cannot be granted since only $m - 1$ items are left. Therefore, $HRG(s) = \{1\}$ is the set of players whose requests are granted and $sw(s) = 1$.

To see that s is a Nash equilibrium we have to verify that $u_1(x_1, m) \leq 1$, $\forall 0 \leq x_1 \leq m$ and $u_2(1, x_2) \leq 0$, $\forall 0 \leq x_2 \leq m$. Since $v_1(x_1) \leq 1$ then by definition $u_1(x_1) \leq 1$. For the second agent we showed that $u_2(1, m) = 0$. Since $v_2(x_2) = 0$, $\forall 0 \leq x_2 \leq m - 1$ then by definition $u_2(x_2) = 0$, $\forall 0 \leq x_2 \leq m - 1$.

The optimal allocation is $OPT = (0, m)$ with a social welfare $sw(OPT) = m$. Then $PoA \geq m$.

To show that $PoA \leq m$, let $s(x_1, ..., x_n)$ be a Nash equilibrium strategy profile of knapsack game G with m items, players $\mathcal{N} = \{1, ..., n\}$ and valuation functions $v_1, ..., v_n$. Let $OPT = (a_1, ..., a_n)$ be an optimal allocation of the m items to the n players. Let i be the player with the best valuation ratio in the optimal allocation: $s_i(a_i) \prec s_j(a_j)$, $\forall j \neq i$. If agent i is granted at least a_i items at s then $sw(s)/sw(OPT) \geq m$.

If agent i is not granted at least a_i items at s then at least one agent has better payoff than $v_i(a_i)/a_i$. Otherwise, agent i could change its request and receive a_i items which implies s is not a Nash equilibrium. Therefore $PoA \leq m$. □

3 Single-round games

In this section we analyze the HRG mechanism for (single-round) knapsack games. In general the HRG mechanism may admit many different Nash equilibria, not all yielding the same allocation. We show that we can restrict our attention to certain bad equilibria in which agents are especially greedy, requesting as many items as possible even when their marginal valuation is zero.

We give the following definition in order to deal with the pathological case in which agents have constant valuation functions after some point. If agents have strictly increasing valuation functions then all Nash equilibria are *tight*.

Definition 3.1. *A Nash equilibrium strategy profile is* tight *if no agent can change its request to be awarded more items.*

Example 2. Consider a game G with 2 players and $m = 10$ items to allocate. Let $v_1(x) = 11$ and $v_2(x) = x$, $\forall\ x \in \{1, ..., 10\}$. Then strategy profile $s(1, 9)$ is a Nash equilibrium, since neither player can improve its payoff. On the other hand, s is not a *tight* Nash equilibrium since player 1 *could* successfully request up to 10 items. In all tight Nash equilibria for this game, player 1's strategy is $s_1(10)$, while regardless of player 2's strategy, its request won't be granted.

Lemma 3.1. *A strategy profile $s(x_1, ..., x_n)$ is a tight Nash equilibrium if and only if:*

1. *no items remain unallocated, and*
2. *$\forall i \in HRG(s)$, $s_i(x_i + 1) \succ \bar{s}$, and*
3. *$\forall i \notin HRG(s)$, $s_i(1) \succ \bar{s}$*

Proof. ($\Rightarrow$) Assume s is a tight Nash equilibrium, and prove the three statements hold.

1. If some items remain unallocated, some agent could change its request to be awarded the extra items, which contradicts the definition of a tight Nash equilibrium.
2. Let $j \in HRG(s)$ be the agent with $s_j = \bar{s}$. Then $s_j(x_j + 1) > \bar{s}$. For any other winning agent $i \neq j$, $i \in HRG(s)$, if $s_i(x_i + 1) \prec s_j(x_j)$, i could successfully request at least one additional item.
3. If for some player $i \notin HRG(s)$ $s_i(1) \prec \bar{s}$ then player i could request and be awarded 1 item instead of zero.

($\Leftarrow$) Assume s satisfies the three statements, and prove s is a tight Nash equilibrium. Consider an agent $i \notin HRG(s)$. Since for any x_i, $s_i(x_i) \geq s_i(1) > \bar{s}$, agent i's request would only be considered after those of all other winning agents, when all items have already been allocated. Similarly, if a winning agent $i \in HRG(s)$ changes its request from x_i items to $x'_i > x_i$, its request will only be considered after all other winning agents' and so the number of unallocated items would be at most x_i, not enough to grant i's request. □

Lemma 3.2. *All tight Nash equilibria of a given knapsack game instance yield the same allocation.*

Proof. We begin by observing that at any tight Nash equilibrium strategy profile s, the set of successful agents is $HRG(s) = \{i : s_i(1) \preceq \bar{s}\}$, and that any successful agent i requests $x_i = \max\{x \in \{0, ..., m\} : s_i(x) \preceq \bar{s}\}$ items.

Now we claim that for any fixed knapsack game instance, any two tight Nash equilibrium strategy profiles s and t have the same cutoff point. Assuming by contradiction that $\bar{s} \prec \bar{t}$ implies by the previous observation that every winning player in s must be a winner in t, and every winner in t is awarded at least as many items as a winning player in s. Moreover, the player with strategy $\bar{t}$ is awarded strictly more items in t than in s. But this is not possible since both s and t are tight and hence allocate all m items.

If two strategies profiles for a given game have the same cutoff point, then the winner set and their requests are identical. ☐

Proposition 3.3. *If each valuation function is strictly increasing, then $PoA = PoS$.*

Proof. First observe that when valuation functions are strictly increasing, all Nash equilibrium profiles are tight. If an agent could successfully increase its request, it would do so. Thus, by Lemma 3.2, the social welfare values of all Nash equilibria are equal. ☐

The following lemma shows that in calculating the PoA we can restrict our attention to tight equilibria.

Lemma 3.4. *Given any Nash equilibrium strategy profile, there always exists a tight Nash equilibrium strategy profile of only lower social welfare.*

Proof. Let $t = (t_1, ..., t_n)$ be a tight Nash equilibrium strategy profile and let $s = (s_1, ..., s_n)$ be some other Nash equilibrium strategy profile. Assume for contradiction that some agent i is awarded more items at t than at s. We will show that i could always successfully request $t_i = (y_i, v_i(y_i))$, which implies s is not in equilibrium. If agent i is not granted its request t_i then there must not have been enough remaining items when i's request was considered; that is, more than $m - x_i$ items must already have been allocated to players with better requests. Let $s_j = (x_j, v_j(x_j))$ be the request of each player j in s. Then:

$$\sum_{j \in \mathcal{N} : s_j \prec t_i} x_j > m - y_i$$

But this is not possible since t is a tight Nash equilibrium: if player j requests more at s than at t (i.e., $x_j > y_j$) then we have $s_j > \bar{t} \geq t_i$. Since no agent is awarded more items at t than at s, the social welfare at t cannot be better than that at s. ☐

Proposition 3.5. *Every knapsack game admits a (tight) Nash equilibrium.*

Proof. In a given game instance with n agents and m items, there are at most $n \cdot (m + 1)$ different possible *individual* strategies. Let $\alpha_1, \alpha_2, ..., \alpha_{n \cdot (m+1)}$ be the sequence of these strategies, in sorted order. Let $s = (s_1(x_1), ..., s_n(x_n))$ be a strategy profile such that $x_i = \max\{x \in \{1, ..., m\} : s_i(x) \preceq \alpha_m\}$ if $s_i(1) \prec \alpha_m$ and $x_i = 0$ otherwise. Then we claim that s is a tight Nash equilibrium.

To show this, we verify the three conditions of Lemma 3.1. 1) Exactly m items are requested at s, and therefore the mechanism will allocate all items. 2) By definition of s, if any winning agent i

requests more items, it will be unsuccessful since its request will only be considered after those of all other winners, after which point only x_i items will remain unallocated. 3) Similarly, if a losing agent requests any nonzero number of items, its request will only be considered after those of all winners, at which point no items will be left unallocated. $\square$

Theorem 3.6. *The Price of Anarchy of the HRG mechanism is at most 2.*

Proof. Let $s = (s_1(x_1), ..., s_n(x_n))$ be a tight Nash equilibrium and let $OPT = (a_1, ..., a_n)$ be an optimal allocation. Let $A = \{i \in \mathcal{N} : a_i > x_i\}$ be the set of agents awarded more items in OPT than at equilibrium s. Then $sw(OPT) \leq sw(A) + sw(s)$, where $sw(A)$ is the sum of valuations of agents in A. It suffices to show that $sw(A) \leq sw(s)$. To do so, let $\bar{s} = s_j(x_j)$ for some j. By Lemma 3.1 , we have $s_i(a_i) > \bar{s}$, $\forall\ i \in A$, which implies $\frac{v_i(a_i)}{a_i} \leq \frac{v_j(x_j)}{x_j}$. Lemma 3.1 also implies $s_i(x_i) \preceq \bar{s}$, $\forall i \in HRG(s)$. Therefore $\frac{v_j(x_j)}{x_j} \leq \frac{v_i(x_i)}{x_i}$, and hence:

$$sw(A) = \sum_{i \in A} v_i(a_i) = \sum_{i \in A} a_i \cdot \frac{v_i(a_i)}{a_i} \leq \sum_{i \in A} a_i \cdot \frac{v_j(x_j)}{x_j} = \frac{v_j(x_j)}{x_j} \cdot \sum_{i \in A} a_i \leq \frac{v_j(x_j)}{x_j} \cdot m \leq sw(s)$$

$\square$

3.1 Complexity of computing Nash equilibria

We now present an algorithm that finds (as the reader can verify) the Nash equilibrium in the full information setting, in $O((n \log m)^2)$ time. *FindEquilibrium* performs a search for the greatest request that passes the cutoff test, implemented by a helper function *BelowCutoff*. The helper function tests whether the request $s_i(x_i)$ is below the cutoff of a tight Nash equilibrium of the game defined by agents in $\mathcal{N}$ and m. As discussed in previously, this cutoff point is unique for any tight Nash equilibrium, and a player is guaranteed to be granted any request below this point.

Algorithm 2 FindEquilibrium($\mathcal{N}$, m)

```
for all $i \in \mathcal{N}$ do
    $\alpha_i = \max_{x_i \in \{0, ... m\}} \{ \text{BelowCutoff}(s_i(x_i), \mathcal{N}, m) \}$
end for
return $(\alpha_1, ..., \alpha_n)$
```

Algorithm 3 BelowCutoff($s_i(x_i), \mathcal{N}, m$)

```
for all $j \in \mathcal{N}$ do
    $\alpha_j \leftarrow \max\{x_j \in \{0, ..., m\} : s_j(x_j) \prec s_i(x_i)\}$
end for
return true if $\sum_{i \in \mathcal{N}} \alpha_i \leq m$ else false
```

4 Multiple-round games

In a k-round knapsack game, the m items are partitioned into k bundles, which are distributed among the n agents in k successive (single-round) knapsack games or *rounds*. Let $m_1, ..., m_k$

be the sizes of the bundles with $\sum_{t=1}^{k} m_t = m$. As before, the agents have valuation functions $v_i : \{0, ..., m\} \to \mathbb{R}_0^+$, which are normalized ($v_i(0) = 0$), are nondecreasing, and exhibit diminishing marginal returns.

Let $\mathcal{X}^t$ be the set of winners in round t and let x_i^t be the number of items requested by i in game t. Let $\alpha_i^t = \sum_{j=1,..,t: i \in \mathcal{X}^j} x_i^j$ be a running sum of the items allocated to agent i in the first t games, with $\alpha_i^0 = 0$ for all i. In round t, agent i's valuation function v_i^t is its *marginal valuation* given the number of items received in the earlier rounds (see Fig. 2):

$$v_i^t(x) = v_i(x + \alpha_i^{t-1}) - v_i(\alpha_i^{t-1})$$

Observe that these marginal valuations functions v_i^t indeed are normalized, are nondecreasing and have diminishing marginal returns, just like the full valuation functions v_i. G^t will denote the knapsack game played at round t with m_t items and valuation functions v_i^t. Observe that these individual knapsack games agents are playing at each round depend on how items have been allocated in previous rounds, and indirectly, on players' strategies in previous rounds.

A strategy or request for agent i is a k-tuple $s_i(x_i^1, ..., x_i^k) = (s_i^1(x_i^1), ..., s_i^k(x_i^k))$ where $s_i^t(x_i^t) = (x_i^t, v_i^t(x_i^t))$ is the request of player i in game G^t. We will sometimes abuse notation and refer to the strategy of player i in G by s_i, and the strategy of player i in game G^t by s_i^t. A *strategy profile* for a k-round knapsack game will refer to an n-tuple of strategies $s = (s_1, ..., s_n)$ and a strategy profile for game G^t will refer to the n-tuple of requests of players in round t, $s^t = (s_1^t, ..., s_n^t)$.

As before, we will denote by $OPT^G = (a_1, ..., a_n)$ or OPT, when G is implied, an optimal allocation of items to the agents of G. We denote the social welfare of the optimal allocation by $sw(OPT^G) = \sum_{i=1}^{n} v_i(a_i)$. We denote the social welfare of a strategy profile $s(s_1, ..., s_n)$ by $sw(s) = \sum_{i=1}^{n} v_i(\alpha_i^{k+1})$.

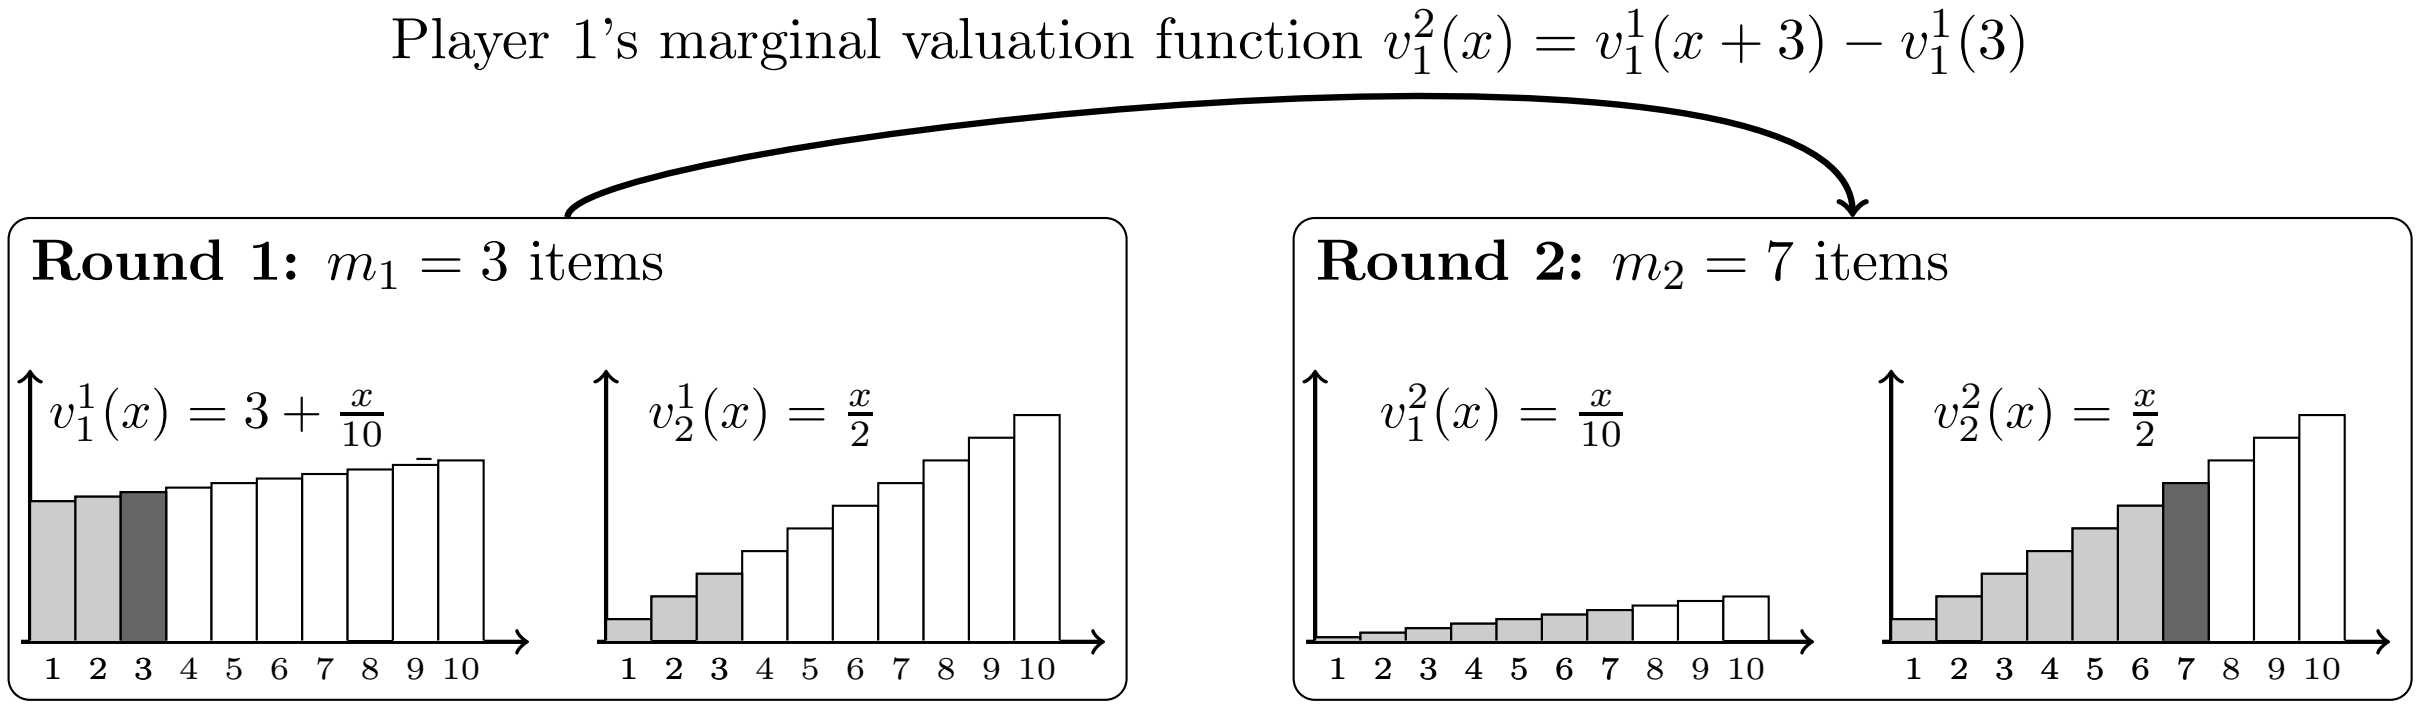

Figure 2: Marginal valuation functions.

Definition 4.1. *We will say that strategy profile s is a myopic equilibrium for the k-round knapsack game G if for all rounds t, s^t is a Nash equilibrium of G^t.*

Definition 4.2. *The myopic Price of Anarchy (PoA) bounds the ratio of the optimal social welfare and the social welfare of the worst myopic equilibrium in any k-round Knapsack Game:*

$$PoA = \sup_{s:\ myopic\ eq.} \frac{sw(OPT^G)}{sw(s)}$$

Our goal in this section is to analyze how a central entity should partiton the m items into bundles in order to obtain as good a PoA as possible. For the rest of this section let W be the social welfare of G at strategy profile s, and let W^t be the social welfare of G^t at s^t. Let $\Delta^t = \max_i v_i^t(1)$ be the highest valuation an agent has in round t for receiving one item.

Lemma 4.1. *For any k-round knapsack game G, and myopic equilibrium strategy profile s, for all $t \in \{1, ..., k\}$, $\Delta^t \geq \frac{W^t}{m_t} \geq \Delta^{t+1}$.*

Proof. For the first inequality, since in game G^t the highest valuation for one item is Δ^t, and valuation functions have diminishing marginal returns, $\Delta^t \cdot m_t \geq W^t$.

For the second inequality, assume by contradiction that $\Delta^{t+1} > \frac{W^t}{m_t}$. Then, either some items remain unallocated at Nash equilibrium s^t, or there exist a winning player i whose valuation per item ratio, $\frac{v_i^t(x_i^t)}{x_i^t}$, is less than Δ^{t+1}.

Consider player j that has valuation $v_j^{t+1}(1) = \Delta^{t+1}$ from the definition of Δ^{t+1}. If items remain unallocated in game G^t then player j could successfully request more items and get better payoff. On the other hand, if $\frac{v_i^t(x_i^t)}{x_i^t} < v_j^{t+1}(1)$ for some winning player i, then j could have changed its request in game G^t to be awarded at least one extra item. In either case, s^t is not a Nash equilibrium and therefore s is not a myopic equilibrium. ☐

Lemma 4.2. *Fix a k-round knapsack game G and a myopic equilibrium s. Then,*

$$sw(OPT) \leq W + \Delta^{k+1} \cdot \sum_{t=1}^{k} \left(m_t - \frac{W^t}{\Delta^t} \right)$$

Proof. Let $OPT = (a_1, ..., a_n)$ be an optimal optimal allocation of the m items to the agents of game G. Let the set of over awarded agents in game G at s be $Y = \{i \in \mathcal{N} : \alpha_i^k > a_i\}$. To reach this allocation, we can reallocate items from the over awarded agents to some other agents. Let A be the total number of items we need to reallocate to reach the optimal solution. And let $sw(A)$ be the social welfare that these items bring to the agents in the equilibrium solution.

$$A = \sum_{i \in Y} (\alpha_i^k - a_i)$$

$$sw(A) = \sum_{i \in Y} v_i(\alpha_i^k) - v_i(a_i)$$

Let A^t be the number of items we need to reallocate in round t, with $\sum_{t=1}^{k} A^t = A$. Let $sw(A^t)$ be the social welfare these items were bringing to the agents at equilibrium, $\sum_{t=1}^{k} sw(A^t) = sw(A)$. Every item that we reallocate will add at most Δ^{k+1} to the social welfare. On the other hand, $sw(A)$ is lost in the optimal allocation. Therefore,

$$sw(OPT) - W \leq \Delta^{k+1} \cdot A - sw(A)$$

To complete the proof we can show that,

$$\Delta^{k+1} \cdot A - sw(A) \leq \sum_{t=1}^{k} \Delta^{k+1} \left(m_t - \frac{W^t}{\Delta^t} \right)$$

It is enough to show that $\forall\, t \in \{1, ..., k\}$,

$$\Delta^{k+1} \cdot A^t - sw(A^t) \leq \Delta^{k+1}\left(m_t - \frac{W^t}{\Delta^t}\right) \tag{1}$$

Let $\delta \triangleq \frac{W^t}{m_t}$, be the average welfare per item obtained in round t. Then, by Lemma 4.1, $\delta \geq \Delta^{k+1}$. We then get $\Delta^{k+1} \cdot A^t \geq sw(A^t)$, since we reallocate the A^t items to reach the optimal allocation. Let $a \triangleq \frac{sw(A^t)}{A^t}$ be the average welfare brought by the misallocated items in round t. Then $a \leq \Delta^{k+1}$. By definition of Δ^t, and diminishing marginal returns of valuation functions, agents value each item at most Δ^t in round t. Therefore

$$\begin{aligned}(m_t - A^t) \cdot \Delta^t + sw(A^t) &\geq W^t\\ (m_t - A^t) \cdot \Delta^t + a \cdot A^t &\geq \delta \cdot m_t\\ m_t(\Delta^t - \delta) &\geq A^t(\Delta^t - a)\\ A^t &\leq m_t\frac{\Delta^t - \delta}{\Delta^t - a}\end{aligned}$$

Now we are ready to prove equation (1) and complete the proof. From Lemma 4.1, we get:

$$\begin{aligned}\Delta^t &\geq \Delta^{k+1}\\ a \cdot \Delta^t &\geq a \cdot \Delta^{k+1}\\ \Delta^{k+1} \cdot \Delta^t - a \cdot \Delta^{k+1} &\geq \Delta^{k+1} \cdot \Delta^t - a \cdot \Delta^t\\ \Delta^{k+1} \cdot (\Delta^t - a) &\geq (\Delta^{k+1} - a) \cdot \Delta^t\\ \Delta^{k+1} &\geq \Delta^t\frac{\Delta^{k+1} - a}{\Delta^t - a}\\ \Delta^{k+1} \cdot (\Delta^t - \delta) &\geq \Delta^t(\Delta^{k+1} - a)\frac{\Delta^t - \delta}{\Delta^t - a}\\ \Delta^{k+1} \cdot \left(1 - \frac{\delta}{\Delta^t}\right) &\geq (\Delta^{k+1} - a) \cdot \frac{\Delta^t - \delta}{\Delta^t - a}\\ \Delta^{k+1} \cdot m_t\left(1 - \frac{\delta}{\Delta^t}\right) &\geq (\Delta^{k+1} - a) \cdot m_t \cdot \frac{\Delta^t - \delta}{\Delta^t - a}\\ \Delta^{k+1} \cdot m_t\left(1 - \frac{\delta}{\Delta^t}\right) &\geq (\Delta^{k+1} - a) \cdot A^t\\ \Delta^{k+1}\left(m_t - \frac{W^t}{\Delta^t}\right) &\geq \Delta^{k+1} \cdot A^t - sw(A^t)\end{aligned}$$

□

The main result of this section shows how the PoA relates to the choices of bundle sizes. The theorem bounds the PoA when bundle ratios are fixed ($y_t = m_t/m_1$). Intuitively, in the formula below, the y's are chosen by the mechanism, since it can decide how to divide the m items into bundles. On the other hand, the x's are related to players' valuation functions, and the mechanism has no control over their values. The next section will show that chosing y values carefully can bound the PoA.

Theorem 4.3. *The PoA of the k-round knapsack game with bundle sizes m_t is bounded by (where $y_t = m_t/m_1$):*

$$1 + \sup_{x_t \geq 1} \frac{\sum_{t=1}^{k} y_t(1 - \frac{1}{x_t})}{\sum_{t=1}^{k} y_t \prod_{i=t+1}^{k} x_i} \tag{2}$$

Proof. Let G be a k-round game and s be a myopic equilibrium.

We show that there exist $x_1, ..., x_k$, $x_i \geq 1$, such that:

$$\frac{sw(OPT)}{W} \leq \frac{\sum_{t=1}^{k} y_t(1 - \frac{1}{x_t})}{\sum_{t=1}^{k} y_t \prod_{i=t+1}^{k} x_i}$$

From lemma 4.2

$$sw(OPT) \leq W + \Delta^{k+1} \cdot \sum_{t=1}^{k} \left(m_t - \frac{W^t}{\Delta^t} \right)$$

Let $x_t = \frac{\Delta^t}{\Delta^{t+1}} \geq 1$, $\forall 1 \leq t \leq k$. And since s^t is a Nash equilibrium for game G^t, $\Delta^{t+1} \leq \frac{W^t}{m_t}$, $\forall 1 \leq t \leq k$. Then,

$$\begin{aligned} sw(OPT) - W &\leq \Delta^{k+1} \cdot \sum_{t=1}^{k} \left(m_t - \frac{W^t}{\Delta^t} \right) \\ &\leq \Delta^{k+1} \cdot \sum_{t=1}^{k} m_t \left(1 - \frac{\Delta^{t+1}}{\Delta^t} \right) \\ &\leq m_1 \Delta^{k+1} \cdot \sum_{t=1}^{k} y_t \left(1 - \frac{1}{x_t} \right) \end{aligned} \tag{3}$$

Observe that $\Delta^{t+1} = x_{t+1}\Delta^{t+2} = x_{t+1} \cdot ... \cdot x_k \cdot \Delta^{k+1} = \Delta^{k+1} \prod_{i=t+1}^{k} x_i$. Then,

$$\begin{aligned} W = \sum_{t=1}^{k} W^t &\geq \sum_{t=1}^{k} m_t \Delta^{t+1} \\ &= \sum_{t=1}^{k} m_t \cdot \Delta^{k+1} \cdot \prod_{i=t+1}^{k} x_i \\ &\geq m_1 \Delta^{k+1} \cdot \sum_{t=1}^{k} y_t \cdot \prod_{i=t+1}^{k} x_i \end{aligned} \tag{4}$$

From inequalities (3) and (4) we infer that for any knapsack game with bundle sizes m_t, there exist $x_1, ..., x_k$ such that,

$$\frac{sw(OPT) - W}{W} \leq 1 + \frac{\sum_{t=1}^{k} y_t \left(1 - \frac{1}{x_t}\right)}{\sum_{t=1}^{k} y_t \cdot \prod_{i=t+1}^{k} x_i}$$

$$PoA = 1 + \sup \frac{sw(OPT) - W}{W} \leq 1 + \sup_{x_t \geq 1} \frac{\sum_{t=1}^{k} y_t \left(1 - \frac{1}{x_t}\right)}{\sum_{t=1}^{k} y_t \cdot \prod_{i=t+1}^{k} x_i}$$

□

5 Evaluating the PoA

In this section we present two results analyzing the expression (2) above. First, we that show supremum of this expression taken over all valid choices of x_t but fixing $y_t = t$, which corresponds to a particular choice of bundle sizes (see Sec. 4), is $1/k$, indicating that the PoA given in (2) *for such bundle sizes* equals $1 + 1/k$. Second, we show that the min-sup of this expression, now also taken over choices of y_i, which corresponds to considering all possible choices of bundle sizes, equals the same value $1/k$, indicating that there is no superior set of bundle sizes.

Theorem 5.1. *Define*

$$F(x_1, ..., x_k) \triangleq \frac{\sum\limits_{i=1}^{k} i(1 - \frac{1}{x_i})}{\sum\limits_{i=1}^{k} i \prod\limits_{j=i+1}^{k} x_j} \quad x_i \geq 1, \ i = 1, ..., k$$

Then $\sup\limits_{\mathbf{x}} F(\mathbf{x}) = \frac{1}{k}$.

Proof. First observe that

$$F(\mathbf{x}) = \frac{1 - \frac{1}{x_1} + \sum\limits_{i=2}^{k} i(1 - \frac{1}{x_i})}{\sum\limits_{i=1}^{k} i \prod\limits_{j=i+1}^{k} x_j} < \lim_{x_1 \to \infty} F(\mathbf{x})$$

If we set $x_i = \frac{i}{i-1}$, $i = 2, ..., k$, then we have $\lim\limits_{x_1 \to \infty} F(\mathbf{x}) = \frac{1}{k}$. Thus to prove the theorem, it remains to show that $\lim\limits_{x_1 \to \infty} F(\mathbf{x}) \leq \frac{1}{k}$.

We note that the following inequalities are equivalent:

$$\begin{aligned}
\lim_{x_1\to\infty} F(\mathbf{x}) \le \frac{1}{k} \quad &\iff \quad \lim_{x_1\to\infty}\left(\sum_{i=1}^{k} i \prod_{j=i+1}^{k} x_j - k\sum_{i=1}^{k} i(1-\frac{1}{x_i})\right) \ge 0 \\
&\iff \quad \lim_{x_1\to\infty}\left(\sum_{i=1}^{k}(iz_i + ik\cdot\frac{z_i}{z_{i-1}}) - \sum_{i=1}^{k} ik\right) \ge 0, \qquad (5) \\
&\qquad \text{where } z_i = \prod_{j=i+1}^{k} x_j,\ i = 1,...,k-1; z_k = 1;\ z_0 = x_1 z_1
\end{aligned}$$

Now define a function $C : [0,\infty)^{k-1} \to \mathbb{R}$:

$$C(\mathbf{z}) = \sum_{i=1}^{k}(iz_i + ik\cdot\frac{z_i}{z_{i-1}}) - \sum_{i=1}^{k} ik$$

Notice that C is a function of $k-1$ variables since z_0 and z_k are fixed. Also notice that the domain of C strictly includes the domain of $\mathbf{z}$ as defined in Eq. 5. To complete the proof, we show that $C(\mathbf{z}) \ge 0$ for any $\mathbf{z} \in [0,\infty)^{k-1}$. We will do this in two steps: (i) showing that $C(\mathbf{z})$ has a unique stationary point, and then (ii) showing that $C(\mathbf{z}) \ge 0$ both at any of the domain boundaries and the stationary point.

$C(\mathbf{z})$ has a unique stationary point

Let $\mathbf{a} = (a_1, ..., a_{k-1})$ be a stationary point for function C, and let $a_0 = z_0 = x_1 z_1$ and $a_k = z_k = 1$:

$$\frac{\partial C}{\partial z_i}(\mathbf{a}) = i + \frac{ik}{a_{i-1}} - k(i+1)\frac{a_{i+1}}{a_i^2} = 0,\ i = 1,...,k-1 \qquad (6)$$

We show now by induction that each a_i can be written as a function of a_1.

For the base case, let $a_0 = x_1 \cdot a_1 = f_0(a_1)$ and $f_1(a_1) = a_1$.

Now assume that $a_{i-1} = f_{i-1}(a_1)$ and $a_i = f_i(a_1)$. Then we will define a_{i+1} as a function of a_1 as follows. From Eq. 6 we can infer:

$$\begin{aligned}
a_{i+1} &= \left(i + \frac{ik}{a_{i-1}}\right)\cdot\frac{a_i^2}{k(i+1)} \\
a_{i+1} &= \left(i + \frac{ik}{f_{i-1}(a_1)}\right)\cdot\frac{f_i^2(a_1)}{k(i+1)} \triangleq f_{i+1}(a_1) \qquad (7)
\end{aligned}$$

where $f_{i+1}(\cdot)$ is the name given to the expression in Eq. 7 as a function of a_1.

Therefore the equations $a_i = f_i(a_1)$, $i = 1,...,k-1$ uniquely define a stationary point $\mathbf{a}$ with respect to a_1. To show that the stationary point $\mathbf{a}$ is unique, we only need to show that $f_k(a_1) = 1$ has a unique solution. For this it is sufficient to show that the derivative of f_k with respect to a_1 is always positive: $f_k'(a_1) > 0$.

We show this by induction on $i = 0,...,k$. Let $h_i = \frac{f_i}{f_{i-1}}$, $i = 2,...,k-1$. The inductive hypothesis is that $f_i'(a_1) > 0$, $i = 1,...,k$ and $h_j(a_1) > 0$ and $h_j'(a_1) > 0$, $j = 2,...,k$.

For the base case, observe the following:

$$\begin{aligned} f_1(a_1) = a_1 > 0 \quad &\text{and} \quad f_1'(a_1) = 1 > 0 \\ f_2(a_1) = \frac{x_1 a_1^2 + k a_1}{2kx_1} \quad &\text{and} \quad f_2'(a_1) = \frac{2x_1 a_1 + k}{2kx_1} > 0 \\ h_2(a_1) = \frac{f_2(a_1)}{f_1(a_1)} = \frac{x_1 a_1 + k}{2kx_1} > 0 \quad &\text{and} \quad h_2'(a_1) = \frac{x_1}{2kx_1} > 0 \end{aligned}$$

Now assume that $f_i'(a_1) > 0$, $h_i(a_1) > 0$, and $h_i'(a_1) > 0$. We then observe that $f_{i+1}'(a_1)$, $h_{i+1}(a_1)$ and $h_{i+1}'(a_1)$ are all strictly positive:

$$\begin{aligned} f_{i+1}'(a_1) &= h_i'(a_1) \cdot f_i(a_1) + h_i(a_1) \cdot f_i'(a_1) > 0 \\ h_{i+1}(a_1) &= \left(i + \frac{ik}{f_{i-1}(a_1)}\right) \cdot \frac{f_i(a_1)}{k(i+1)} = \frac{i}{k(i+1)} f_i(a_1) + \frac{i}{i+1} \cdot h_i(a_1) > 0 \\ h_{i+1}'(a_1) &= \frac{i}{k(i+1)} f_i'(a_1) + \frac{i}{i+1} \cdot h_i'(a_1) > 0 \end{aligned}$$

This shows that the equation $f_k(a_1) = 1$ has a unique solution, and thus concludes step (i).

$C(\mathbf{z}) \geq 0$ at all boundary points and the unique stationary point

First observe that $a_i = \frac{k}{i}$ satisfies Eq. 7, $i = 1, ..., k$ and hence $\mathbf{a} = (a_1, ..., a_{k-1})$ is the unique stationary point for C. Now we show that $C(\mathbf{a}) \geq 0$:

$$C(\mathbf{a}) = \sum_{i=1}^{k} (i a_i + ik \cdot \frac{a_i}{a_{i-1}}) - \sum_{i=1}^{k} ik = \sum_{i=1}^{k} (k + k(i-1)) - \sum_{i=1}^{k} ik = 0$$

Let $\mathbf{b} = (b_1, ..., b_{k-1})$ be a boundary point. Then we must show that $C(\mathbf{b}) \geq 0$. Since $\mathbf{b}$ is a boundary point there must exist j such that $b_j = 0$ or $b_j = \infty$:

$$C(\mathbf{b}) = \sum_{i=1}^{k} (i b_i + ik \cdot \frac{b_i}{b_{i-1}}) - \sum_{i=1}^{k} ik$$

The only negative term is $\sum_{i=1}^{k} ik$, which is constant with respect to $\mathbf{b}$. If $b_j = 0$ for some j, then the positive term $(i+1)k \cdot \frac{b_{i+1}}{b_i}$ is infinite and $C(\mathbf{b}) > 0$. On the other hand, if $b_j = \infty$ for some j, then the positive term $ik \cdot \frac{b_i}{b_{i+1}}$ is infinite and again $C(\mathbf{b}) > 0$.

Steps (i) and (ii) above show that $C(\mathbf{z}) \geq 0 \ \forall z \in [0, \infty)^{k-1}$ and therefore $C(\mathbf{z}) \geq 0$ on the restricted domain of equation (5), which completes the proof. □

Corollary 5.2. *The PoA for the k-round knapsack games with bundle ratios* $\frac{m_t}{m_1} = t$ *is* $\frac{1}{k}$.

Proof. $PoA \leq \frac{1}{k}$ is a consequence of theorems 5.1 and 4.3.

Instances can be constructed as follows showing that the bound $\frac{1}{k}$ is realizable in the limit.

Let G be a k-round knapsack game with $k+1$ players and bundle sizes m_1, $m_2 = 2 \cdot m_1$, ..., $m_k = k \cdot m_1$. Let $v_1(x) = c$ for some constant c, $v_{k+1}(x) = x \cdot \frac{c}{m_1 \cdot k}$, and for $2 \leq i \leq k$, let $v_i(x)$ be defined as

$$v_i(x) = \begin{cases} x \cdot \frac{c}{m_1(i-1)} & \text{if } x < m_1(i-1) \\ c & \text{if } x \geq m_1(i-1) \end{cases}$$

This game reaches myopic equilibrium when each player i successfully requests m_i items in round i. Each player receives an individual payoff of c yielding a total social welfare of $c \cdot k$. This wastes $m_1 - 1$ items in the first round and m_1 items in each following round, leaving player $k+1$ without any items.

On the other hand, the optimal allocation allocates 1 item to player 1, $(i-1) \cdot m_1$ items to player i, for $2 \leq i \leq k$, and $k \cdot m_1 - 1$ items to player $k+1$.

Then,

$$\frac{sw(s)}{sw(OPT)} = \frac{1}{k} - \frac{1}{m_1 \cdot k^2}$$

which approaches $\frac{1}{k}$ as m_1 gets large. □

Theorem 5.3. *Let*

$$G(\mathbf{x}, \mathbf{y}) = \frac{\sum_{i=1}^{k} y_i (1 - \frac{1}{x_i})}{\sum_{i=1}^{k} y_i \prod_{j=i+1}^{k} x_j} \quad y_i \geq 0;\ x_i \geq 1,\ i = 1, ..., k \tag{8}$$

Then $\min_{\mathbf{y}} \sup_{\mathbf{x}} G(\mathbf{x}, \mathbf{y}) = \frac{1}{k}$.

Proof. Fix $y_i = i$. First, since $\sup_{\mathbf{x}} G(\mathbf{x}, y_i = i) = \frac{1}{k}$ by Theorem 5.1, it immediately follows that

$$\min_{\mathbf{y}} \sup_{\mathbf{x}} G(\mathbf{x}, \mathbf{y}) \leq \frac{1}{k} \tag{9}$$

Second, given any $\mathbf{y} = (y_1, ..., y_k)$, $y_i \geq 0,\ i = 1, ..., k$, we have

$$\begin{aligned} G(x_i = \frac{i}{i-1}, \mathbf{y}) &= \frac{\sum_{i=1}^{k} y_i \frac{1}{i}}{\sum_{i=1}^{k} y_i \frac{k}{i}} = \frac{1}{k} \\ \Rightarrow \quad \sup_{\mathbf{x}} G(\mathbf{x}, \mathbf{y}) &\geq \frac{1}{k} \text{, for any } \mathbf{y} \\ \Rightarrow \min_{\mathbf{y}} \sup_{\mathbf{x}} G(\mathbf{x}, \mathbf{y}) &\geq \frac{1}{k} \end{aligned} \tag{10}$$

Combining Ineqs. 9 and 10, the result follows. □

6 Discussion

In this paper, we have introduced the knapsack game, a novel formulation of resource allocation for agents that are honest but reveal only partial information. In the multi-round setting, the equilibrium solution concept we have addressed in our analysis is a myopic Nash equilibrium, in which each round is treated as equivalent to an isolated single-round game (with the evaluation functions updated appropriately). That is, in each round, we assume the players will strategically try to improve their welfare in the current round. An interesting open direction is to analyze the Nash equilibrium in terms of each player's strategy for the entire, multiple-round game, rather than in our myopic setting.

Our PoA results depended on the assumption that valuation functions exhibit diminishing returns. Relaxing this assumption is another clear open problem. Other possible future directions include formulating the problem in the Bayesian setting or moving to a combinatorial knapsack game involving non-identical items with valuation functions defined over sub-sets.

References

[1] N. Alon, F. A. Fischer, A. D. Procaccia, and M. Tennenholtz. Sum of us: Strategyproof selection from the selectors. *CoRR*, 2009.

[2] I. Ashlagi, F. A. Fischer, I. A. Kash, and A. D. Procaccia. Mix and match. *CoRR*, 2010.

[3] L. Blumrosen and N. Nisan. Auctions with severely bounded communication. FOCS, 2002.

[4] L. Blumrosen, N. Nisan, and I. Segal. Multi-player and multi-round auctions with severely bounded communication. ESA, 2003.

[5] P. Briest, P. Krysta, and B. Vöcking. Approximation techniques for utilitarian mechanism design. STOC, 2005.

[6] N. Chen, N. Gravin, and P. Lu. Mechanism design without money via stable matching. *CoRR*, 2011.

[7] W. Cohen and T. Sandholm. Partial-revelation vcg mechanism for combinatorial auctions. AAAI, 2002.

[8] S. Dobzinski and N. Nisan. Mechanisms for multi-unit auctions. EC, 2007.

[9] S. Dobzinski and N. Nisan. Multi-unit auctions: Beyond roberts. *CoRR*, 2010.

[10] S. Dughmi and A. Ghosh. Truthful assignment without money. *CoRR*, 2010.

[11] A. Goldsmith. *Wireless Communications*. Cambridge University Press, 2005.

[12] M. Guo and V. Conitzer. Strategy-proof allocation of multiple items between two agents without payments or priors. AAMAS, 2010.

[13] H. Kellerer, U. Pferschy, and D. Pisinger. *Knapsack Problems*. Springer, 2004.

[14] R. Lavi and C. Swamy. Truthful and near-optimal mechanism design via linear programming. FOCS '05, 2005.

[15] P. Lu, X. Sun, Y. Wang, and Z. A. Zhu. Asymptotically optimal strategy-proof mechanisms for two-facility games. EC, 2010.

[16] A. Mu'alem and N. Nisan. Truthful approximation mechanisms for restricted combinatorial auctions: extended abstract. In *Eighteenth national conference on Artificial intelligence*, 2002.

[17] N. Nisan and A. Ronen. Algorithmic mechanism design. *Games and Economic Behavior*, 2001.

[18] N. Nisan, T. Roughgarden, E. Tardos, and V. Vazirani. *Algorithmic Game Theory*. Cambridge University Press, 2007.

[19] A. D. Procaccia and M. Tennenholtz. Approximate mechanism design without money. EC, 2009.

[20] W. Vickrey. Counterspeculation auctions and competitive sealed tenders. *Journal of The ACM*, 1961.